


## IRIS®



## P3120

## 3" IC PLATFORM


A, R, PAR Incandescent



An IC rated 3" platform which utilizes A19, PAR16 or PAR20 lamps to deliver powerful beams of light from a diminutive 3.5" aperture.

Platform accepts Optical Elements for downlighting, accent lighting wall washing and shower lighting applications.

Optical elements can be changed after installation to adapt the fixture to changing lighting needs as artwork, furniture or other home features are changed.

Ceiling Cutout  
4 3/8" (112mm)

## DESCRIPTION

A specification-grade residential platform dedicated for line voltage A19, PAR16 or PAR20 lamps. Platform is airtight and may be used in direct contact with insulation.

A complete fixture requires an IRiS optical element.

## Features

Optical matte black powder coat inside platforms for a visually dark interior

Integral thermal protector

1/2" plaster lip with centerline notches for precise drywall holes or for use with wet plaster

No flex bar hangers have a tab for consistent depth and set

screws to lock the horizontal placement. Bars span 22 1/2" for 24" joist construction

Platforms are shipped with overspray protector installed in aperture

Platform is air tight to prevent dust marks on ceilings, prevent room drafts and prevent energy loss

Platform is wet location listed when used with shower elements

## Listings

CUL and UL Listed for Damp Location

CUL and UL listed for Feed Through

CUL and UL listed for Direct Contact with Insulation and combustible material


Meets State of California Title 24

Meets Washington State Energy Code

Meets International Energy Conservation Code (IECC)

Meets New York State Energy Conservation Construction Code (NY-ECCC)

Certified Under ASTM-E283

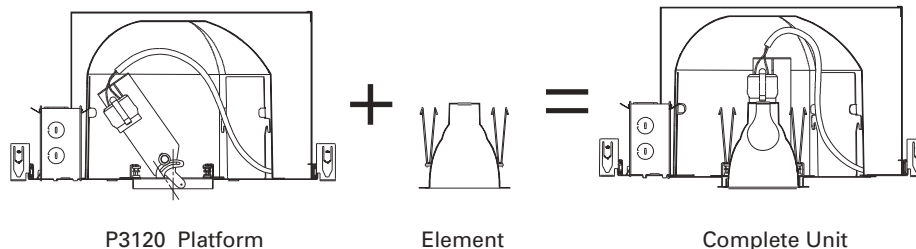

P3120 Platform

Element

Complete Unit

## ACCESSORIES FOR 3" PLATFORMS AND ELEMENTS

**MBCLP:** Mounting bar clips to accommodate grid and T-bar ceiling systems. Clips push onto mounting bars and allow platforms to be installed in 24" O.C. grids. One package contains enough clips to mount 10 platforms; i.e. 40 clips.

**PLE3:** Plaster lip extensions allow IRiS Platforms to be installed in ceilings up to 2" thick. They are field installed onto the platform. For ceilings less than 2" thick, PLE's are easily field cut for optimal installation and are suitable for all Elements. Made from one-piece spun steel (22 gauge) for true round aperture. All surfaces are black polyester powder coated. Ideal for plaster or skim coat ceilings. PLE 3 fits P3120, PN3120, P3MR, and PN3MR.

**FMC3:** A field installed Flush Mount Collar\* which allows the element flange to sit flush with the finished ceiling. Collar installs onto plaster lip when platform is mounted. After ceiling is installed finish contractor adjusts collar to proper height and applies skim coat up to edge of collar. Collar adjusts for any ceiling thickness between 5/8" to 1". Lensed Wall Wash and Shower elements should not be used with FMC as they will be difficult to remove for re-lamping. Self Flanged elements may not be used with FMC accessory. FMC3 fits P3120, PN3120, P3MR, and PN3MR.